AXFR12

Abrasive : Aluminum Oxide
Backing : X Semi Flexible Cotton Cloth
Bond : Resin Over Resin
Coating : Closed
Grit Range : 40-400
Features : Ideal for sanding low alloy steel, stainless steel, rubber, plastic and leather in narrow belts, rolls and flap wheels with spindle and with flange. X semi flexible cotton cloth backing with Aluminum Oxide abrasive. Flexible structure with long life. Easily tearable by hand.

			40		60	80	100	120	150	180	220	240	280	320	400									

Product Form

- Jumbo Roll
- Segmented Belt
- Wide Belt
- Narrow Belt
- Roll
- Sheet
- Disc
- Hook & Loop Disc
- Flap Wheel
- Flap Disc
- Fibre Disc
- Quick Lock Disc

Application Method

- Polishing
- Endless Belt
- Hand Use
- Wide Belt
- Mini Belt
- Flap Wheel Machine
- Floor Sanding
- Orbital Sander
- Hand Grinder
- Mini Disc Sander

Application Area

- Wood
- Low Alloy Steel
- Stainless Steel / Inox
- High Alloy Steel / Heat Resistant Steel
- Aluminium / Zamak
- Brass / Copper / Non Ferrous Metal
- Paint / Varnish / Lacquer
- Plastic / Rubber / Leather
- Cast Iron
- Glass / Stone / Granite / Ceramic

Features

- Antistatic Feature
- Suitable for Wet Applications
- Friction & Heat Absorbant
- Anti-Clogging
- Flexible for Curved Surfaces
- Easily Tearable by Hand
- Tear Resistant



Narrow Belt



Roll

Flap Wheel With Spindle
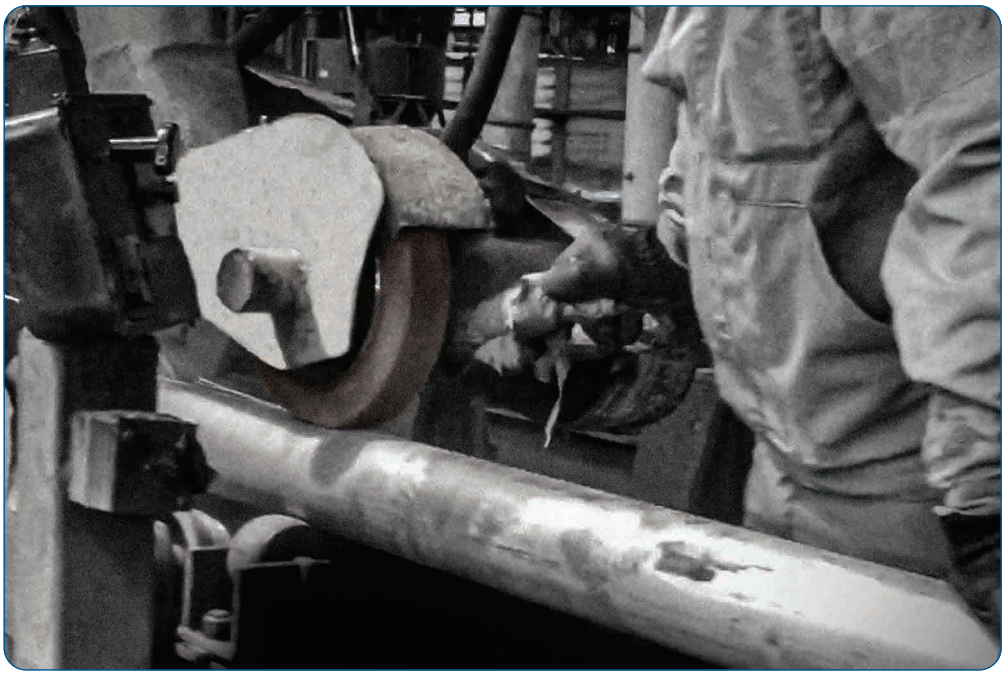
Flap Wheel With Flange